



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CIS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF CIS IS PROHIBITED.


REVISIONS					
ECN/ECO	PLACES	REV.	DESCRIPTION	SIGN	DATE
		E1	Design Release	Wanbin Liu	2019.4.9

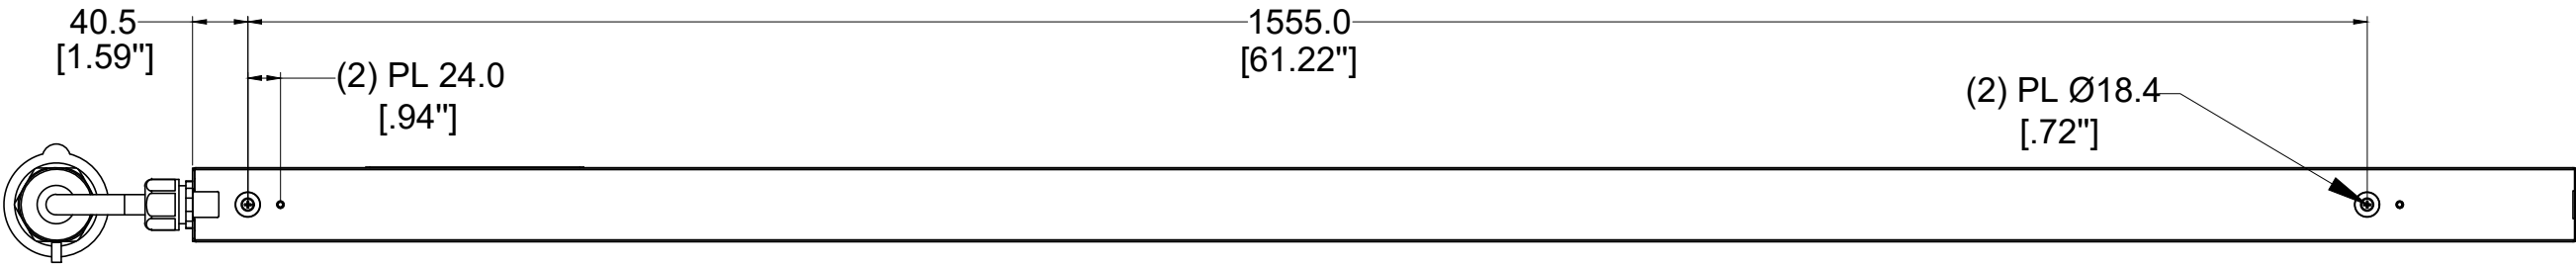


REAR VIEW

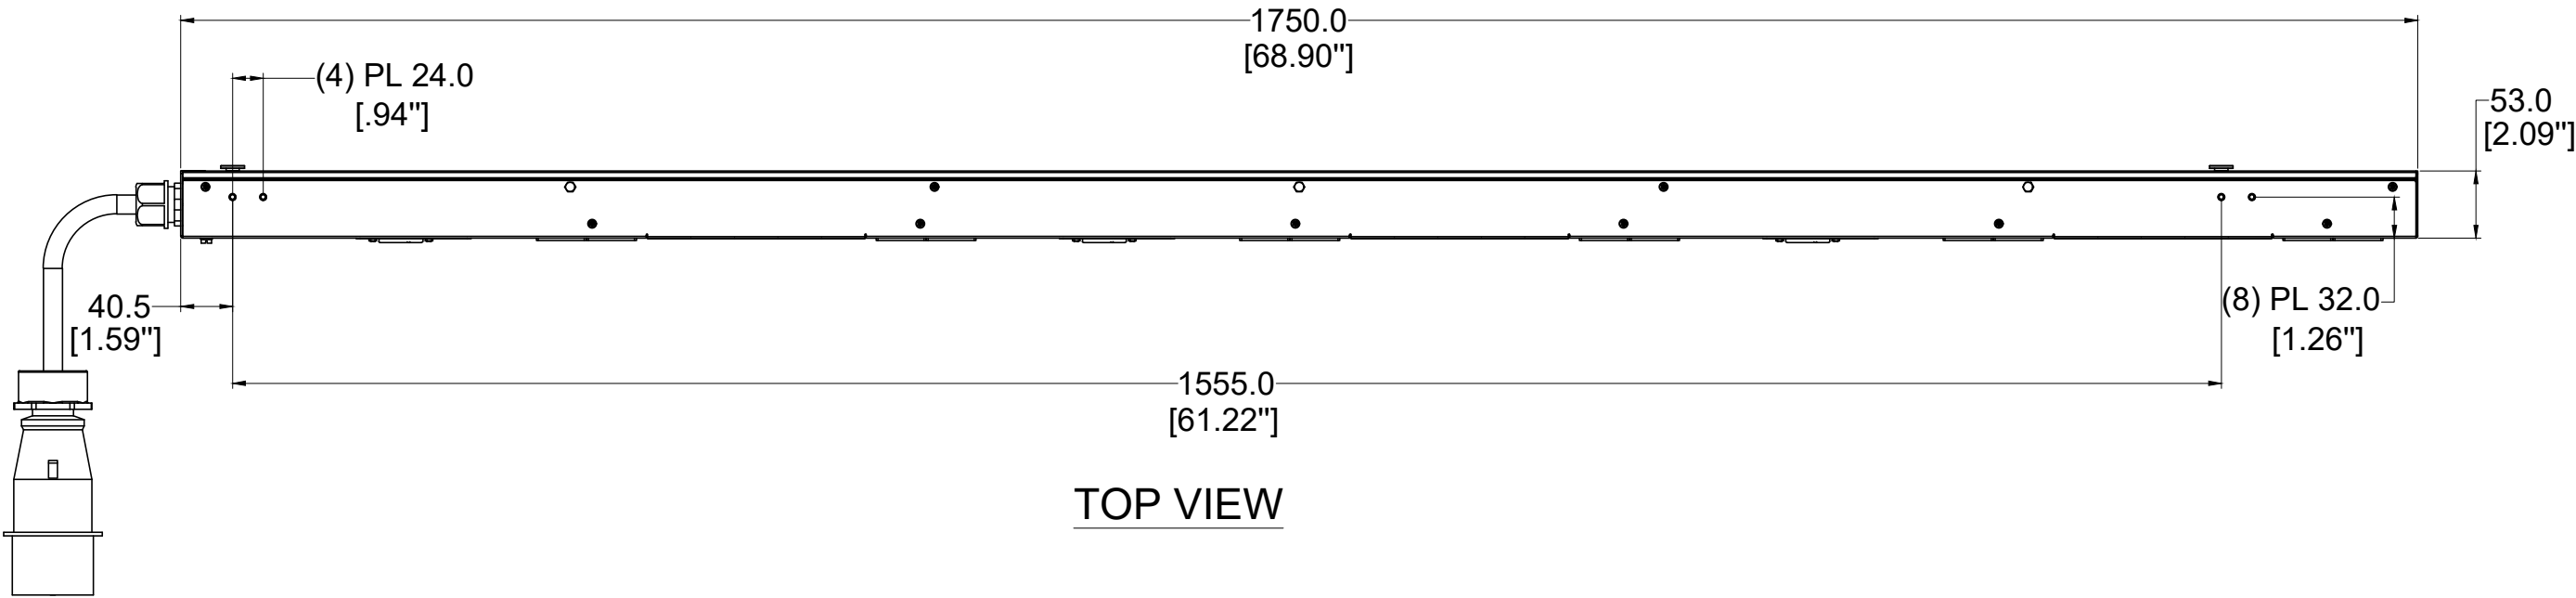


TOP VIEW

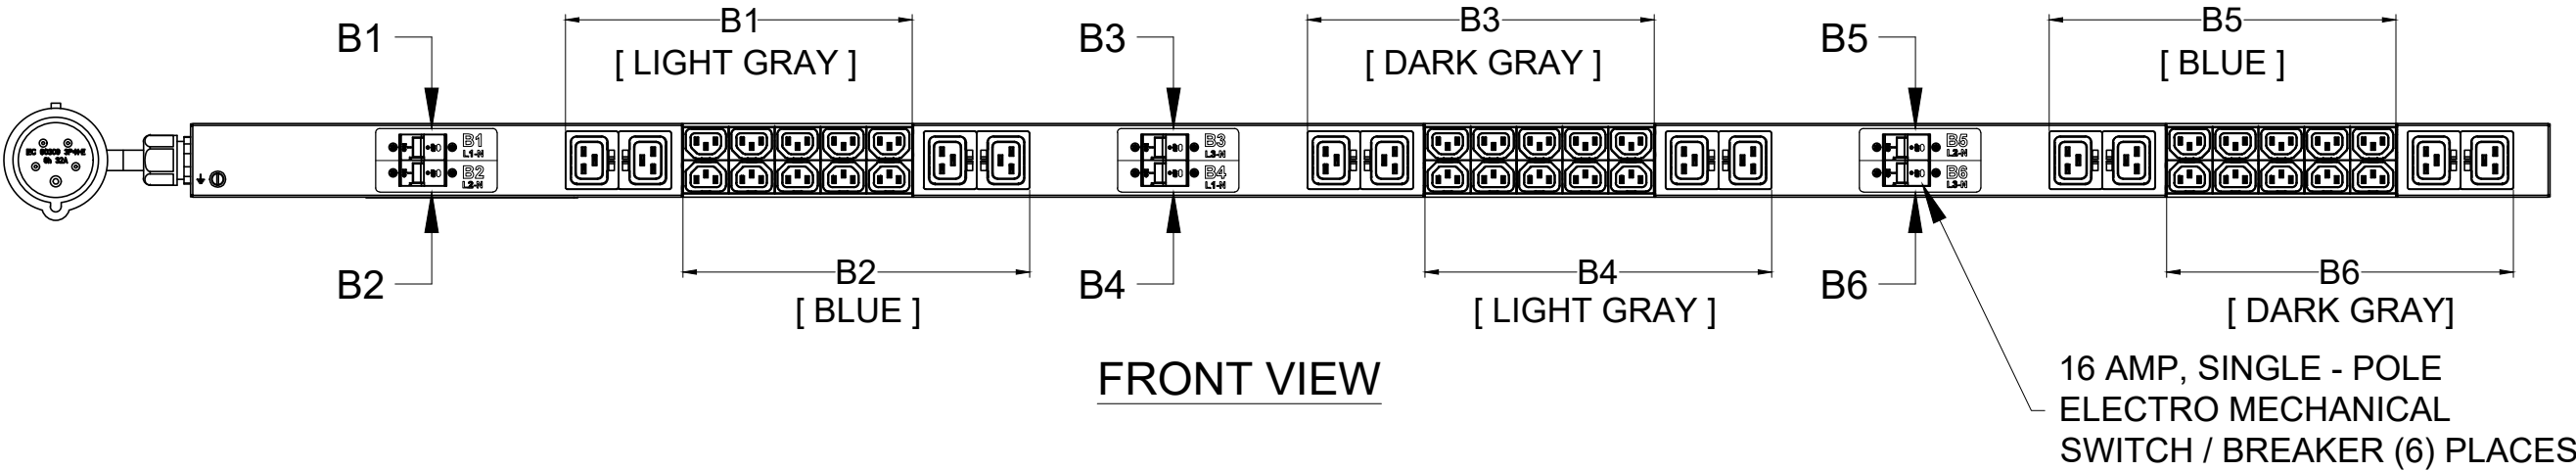


FRONT VIEW

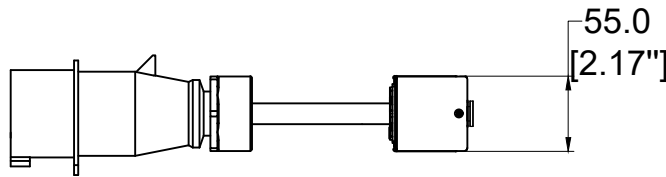


SIDE VIEW



PLUG
32 AMP, 230/400V x 3~ WYE
4P/5W
IEC 60309, SPLASHPROOF, IP44
2P (S); 4T (W), 6H;



RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19



RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

SPECIFICATION:
1. STANDARD:

UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(30) C13, (12) C19
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT VOLTAGE:	200-240/346-415VAC, WYE
INPUT CURRENT:	32A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 32A
INPUT CORD LENGTH:	3m [10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

NOTE:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSION ARE IN INCHES

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ± 1 MM X.X ± 0.5 MM X.XX ± 0.20 MM ØX.X ± 0.4 MM ØX.XX ± 0.20 MM THIRD ANGLE PROJECTION IF 2D AND 3D DIFFER, 2D SHALL TAKE PRECEDENCE	DESIGNER & DATE: Wanbin Liu 2019-4-9	 ASIA PACIFIC CIS WUXI CHINA	DESCRIPTION: EN2.0 PDU	
	STANDARDIZATION/CHECKER & DATE: Hanson Xu 2019-4-11		P/N: EB0811	
	DFM & DATE: Talon Lv 2019-4-11		REV: E1	
	APPROVER & DATE: Kanson Ren 2019-4-11		SCALE 1:5 (DO NOT SCALE DRAWING)	
ITEM WEIGHT (REFERENCE ONLY): Assembly		SIZE: A2		SHEET 1 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY
OF CIS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN
PERMISSION OF CIS IS PROHIBITED.

enLOGIC

SKU #: EB0811
Model #: EP02032-0028
INPUT: 200-240/346-415VAC, WYE, 3PHASE, 50/60Hz, 32A
OUTPUT: C13; 200-240VAC, 10A per outlet
C19; 200-240VAC, 16A per outlet
32A Total

Power Distribution Unit



SKU#:



EB0811

Serial Number



CNXXXXXXX

Made In China

Mfr.Name:ASIA PACIFIC CIS(WUXI)CO LTD

NOTES:

1. INTERNAL WIRING:

WIRE TYPE:

LINE 1/R/X COLOR:

LINE 2/S/Y COLOR:

LINE 3/T/Z COLOR:

EARTH GROUND COLOR:

NEUTRAL WIRE COLOR:

UL AWM 1015, 12AWG


BROWN

BLACK


WHITE

GREEN/YELLOW STRIPE

BLUE

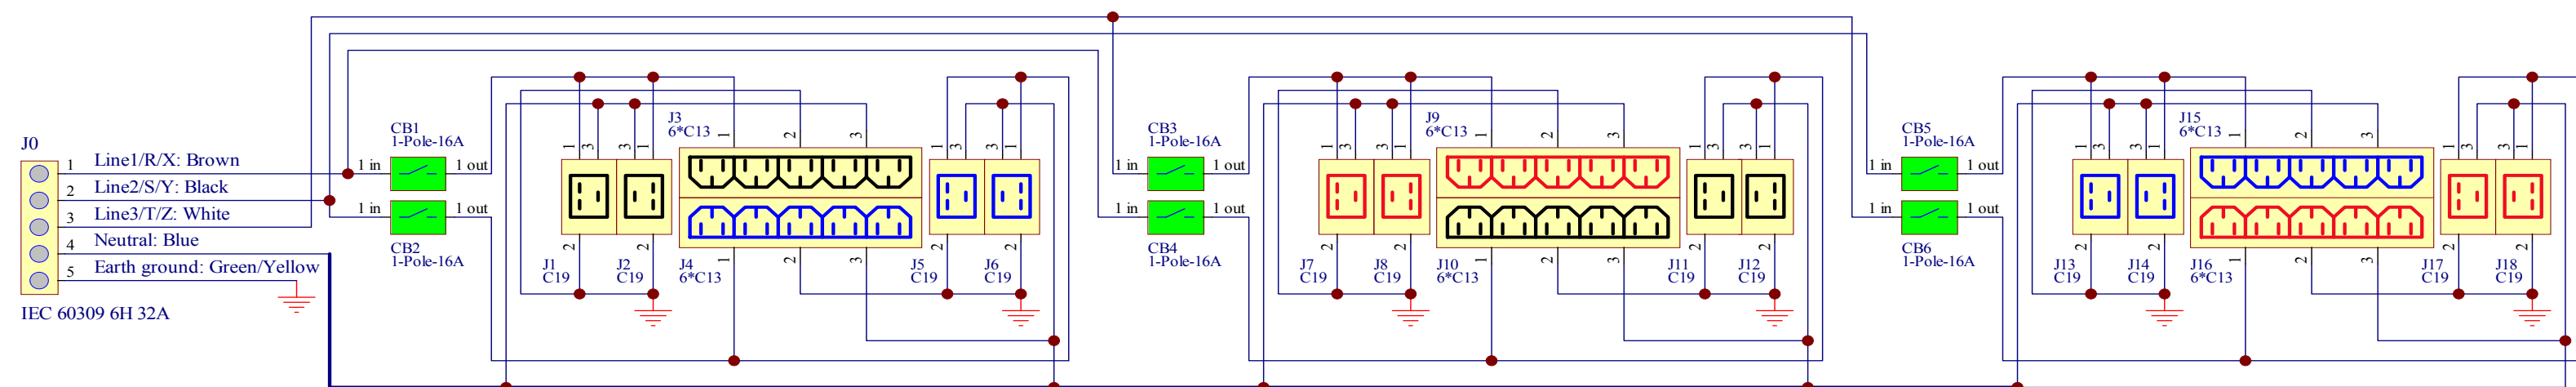

INTERNAL WIRING SCHEMETIC

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: $X, \pm 1 \text{ MM}$ $X.X, \pm 0.5 \text{ MM}$ $X.XX, \pm 0.20 \text{ MM}$ $\varnothing X, X, \pm 0.4 \text{ MM}$ $\varnothing X.XX, \pm 0.20 \text{ MM}$		DESIGNER & DATE: Wankin Liu 2019-4-9 STANDARDIZATION/CHECKER & DATE: Hanston Xu 2019-4-11 DFM & DATE: Talon Lv 2019-4-11 APPROVER & DATE: Kanson Ren 2019-4-11	 ASIA PACIFIC CIS WUXI CHINA
BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY  THIRD ANGLE PROJECTION		DESCRIPTION: EN2.0 PDU	P/N: EB0811
IF 2D AND 3D DIFFER, 2D SHALL TAKE PRECEDENCE		MATERIAL: Assembly	REV: E1
		SCALE 1:5 (DO NOT SCALE DRAWING)	SIZE: A2 SHEET 2 OF 2