


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CIS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF CIS IS PROHIBITED.



REVISIONS				SIGN	DATE
ECN/ECD	PLACES	REV.	DESCRIPTION	Wanbin Liu	2019.3.13
		E1	Design Release		

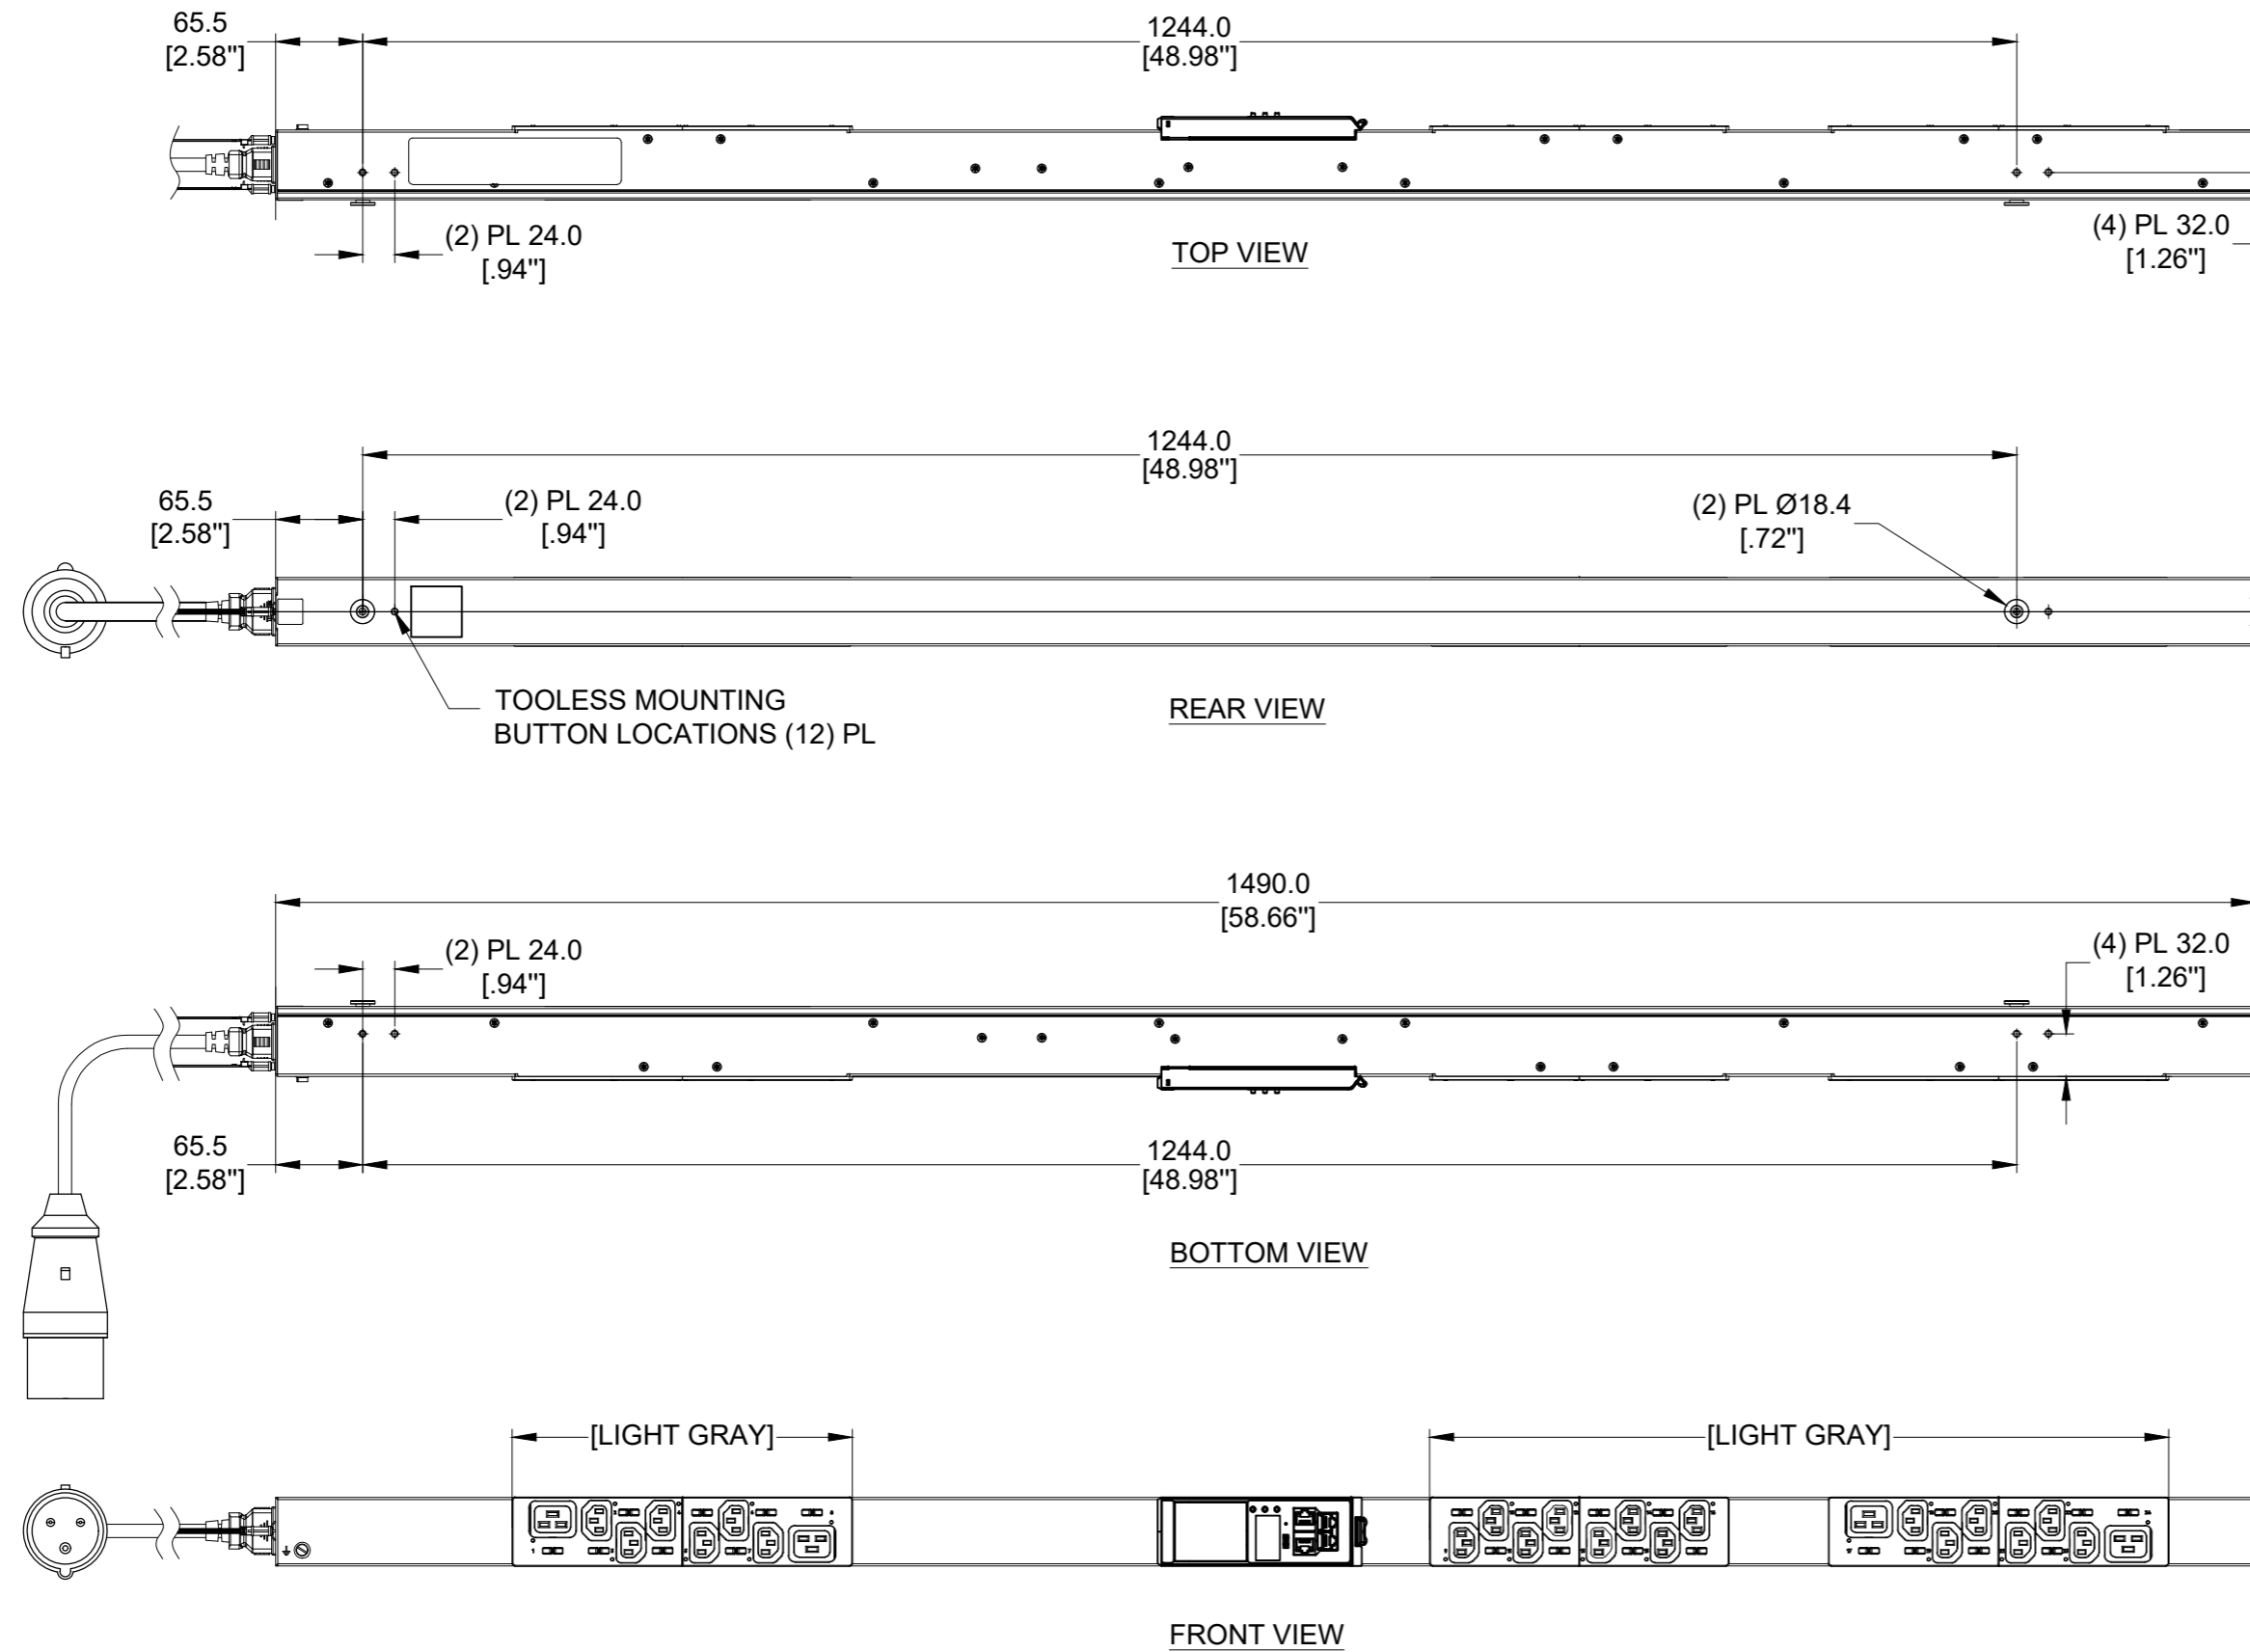

SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(20) C13, (4) C19
INPUT VOLTAGE:	100-240VAC
INPUT CURRENT:	16A
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	3.7kVA
INPUT PLUG:	IEC 60309 2P+E 6H 16A
INPUT POWER CORD:	3m[10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

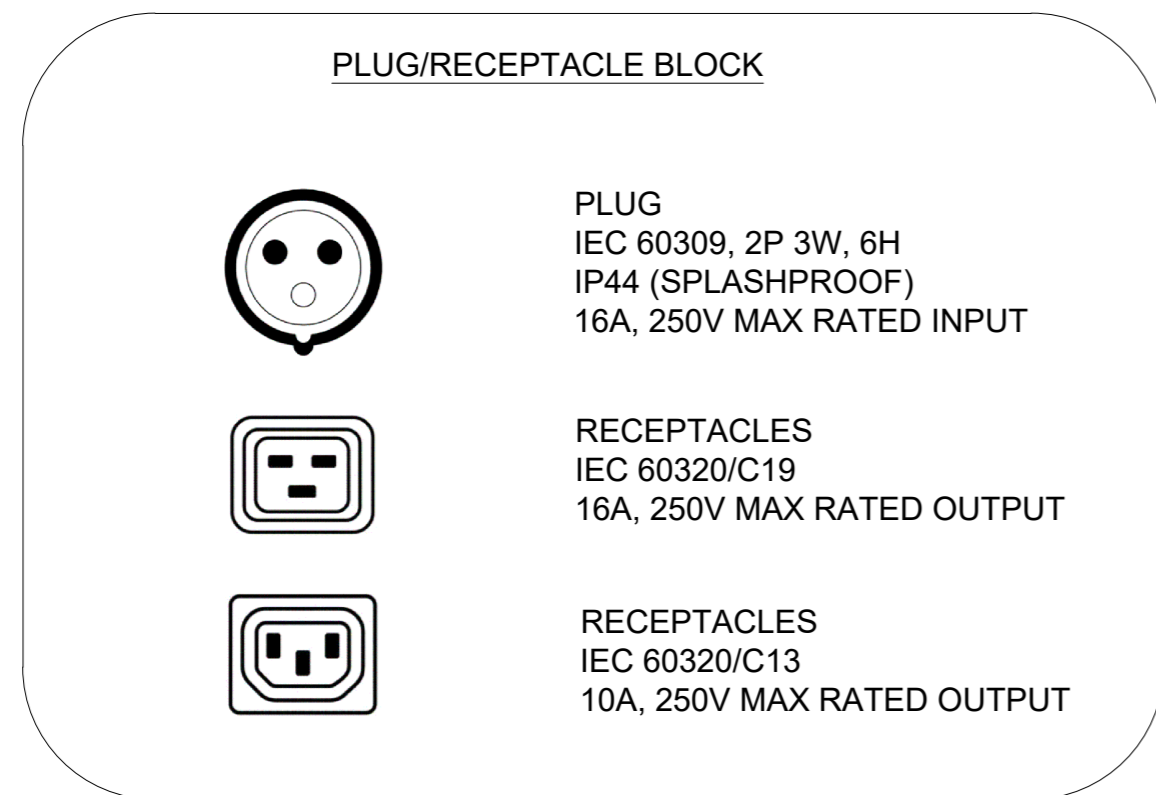






UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X ± 1 MM X.X ± 0.5 MM X.XX ± 0.20 MM ØX.X ± 0.4 MM ØX.XX ± 0.20 MM	DESIGNER & DATE: Wanbin Liu 2019-3-13	
	STANDARDIZATION/CHECKER & DATE: Hanson Xu 2019-3-15	
BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY	DFM & DATE: Talon Lv 2019-3-15	DESCRIPTION: EN2.0 PDU
	APPROVER & DATE: Kanson Ren 2019-3-15	P/N: TA-EN2326
THIRD ANGLE PROJECTION IF 2D AND 3D DIFFER, 2D SHALL TAKE PRECEDENCE	MATERIAL: Assembly	REV: E1 SCALE 1:5 (DO NOT SCALE DRAWING) SIZE: A2 SHEET 1 OF 2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CIS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF CIS IS PROHIBITED.

enLOGIC Power Distribution Unit

SKU#: EN2326
 Model #: EP25016-0013
 INPUT: 100-240VAC, 1PHASE, 50/60Hz, 16A
 OUTPUT: C13; 100-240VAC, 10A per outlet
 C19; 100-240VAC, 16A per outlet
 16A Total
 Mac Address: XX-XX-XX-XX-XX-XX


CIS Global LLC
 1781 W. Dairy Place,
 Suite 185, Tucson,
 Arizona 85705
 USED IN ITE

Mfr. Name: ASIA PACIFIC CIS(WUXI)CO LTD



COMPLIANCE LABEL

NOTES:

- 1. INTERNAL WIRING:
- WIRE TYPE: UL AWM 1015,12 & 18AWG
- LINE 1/R/X COLOR: BROWN
- EARTH GROUND COLOR: GREEN/YELLOW STRIPE
- NEUTRAL WIRE COLOR: BLUE

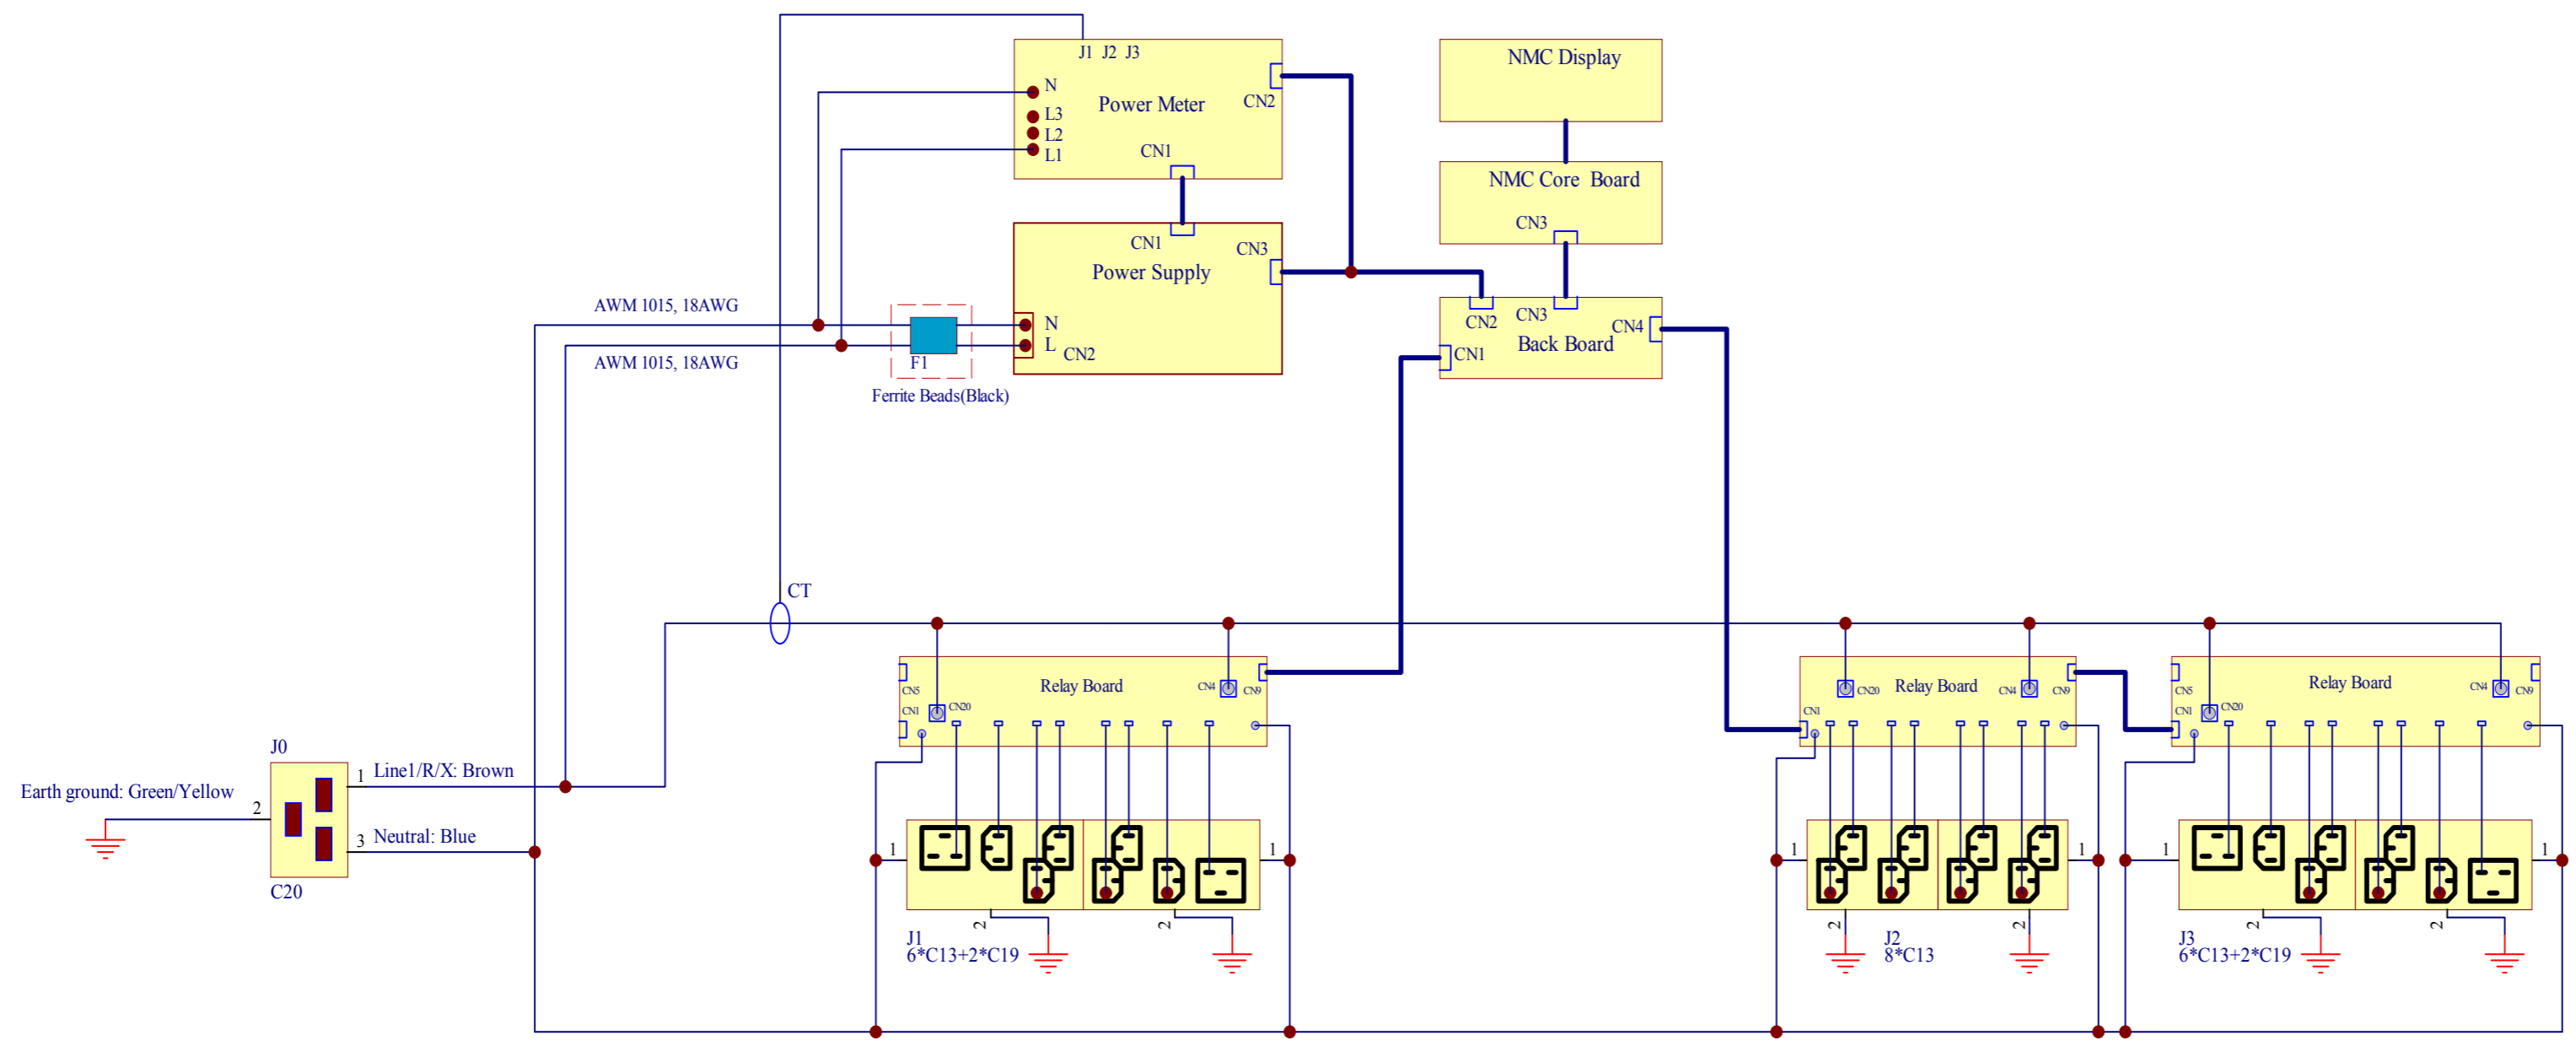

INTERNAL WIRING SCHEMATIC

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X ± 1 MM X.X ± 0.5 MM X.XX ± 0.20 MM ØX.X ± 0.4 MM ØX.XX ± 0.20 MM BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY  THIRD ANGLE PROJECTION IF 2D AND 3D DIFFER, 2D SHALL TAKE PRECEDENCE	DESIGNER & DATE: Wanbin Liu 2019-3-13	 ASIA PACIFIC CIS WUXI CHINA	DESCRIPTION: EN2.0 PDU	
	STANDARDIZATION/CHECKER & DATE: Hanson Xu 2019-3-15			
	DFM & DATE: Talon Lv 2019-3-15	APPROVER & DATE: Kanson Ren 2019-3-15	P/N: TA-EN2326	REV: E1
	MATERIAL: Assembly	SCALE: 1:5 (DO NOT SCALE DRAWING)	SIZE: A2	SHEET 2 OF 2