



CABLE LENGTH SHOWN NOT TO SCALE

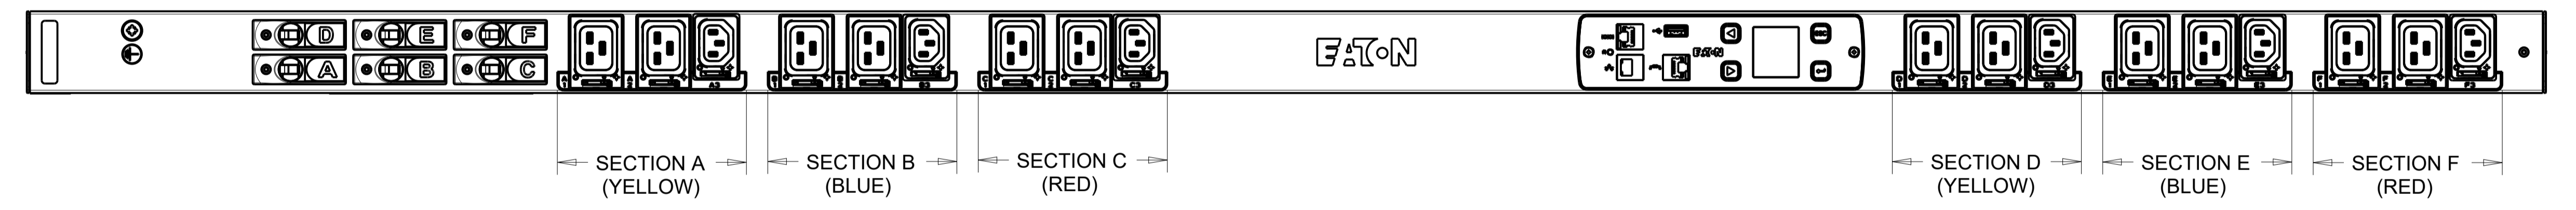

EMIB07		G3 METERED INPUT	
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
CURRENT POWER AND ENERGY METERING FOR INPUT AND BRANCH	IEC 60309-2 32A 400V~ WYE, 3W+N+PE 4.0MM HO7 POWER CORD CABLE LENGTH: 3.0M	(6) IEC 60320 C13 GRIP (12) IEC 60320 C19 GRIP ALTERNATING SECTIONS	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1604MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	3Ø;346-415V~ WYE, 3W+N+PE 50/60HZ 32A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX PER SECTION 32A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(6) 16A 1-POLE	NONE	STANDARD KSP025 - VEPDU G3 EMEA VERT INSTALL NETWORK PACK KA35 OPTIONAL EMP001 - ENVIRONMENTAL PROBE	EMI3DH8FBJC77AM

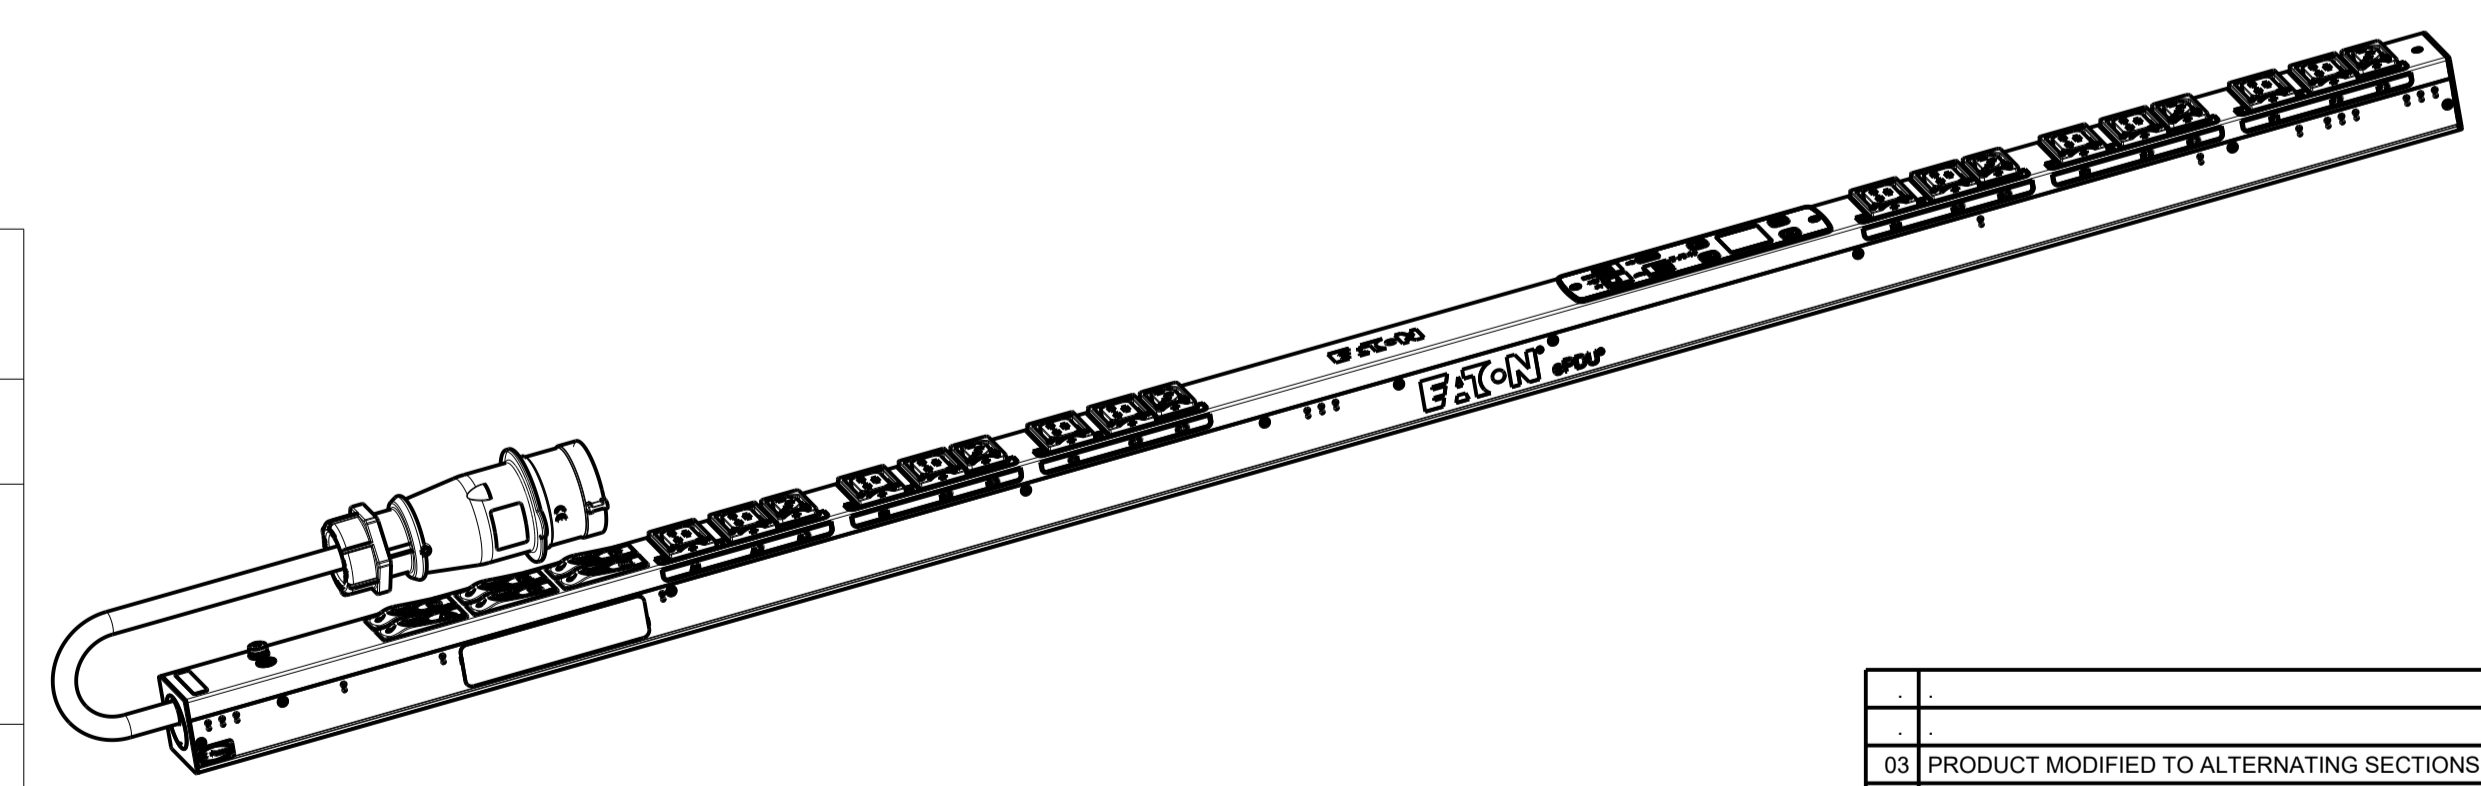

PICTORIAL VIEW
SCALE 0.200

03	PRODUCT MODIFIED TO ALTERNATING SECTIONS	03.09.2018	AEK	M.B
02	CHANGE PACK FROM KSP015 TO KSP025	11.01.2018	AEK	M.B
01	REVISED TO FIX GRAPHICS	21.05.2014	G.McD.	M.B
REV	MODIFICATION	DATE	DESIGNER	VERIF
		HEINEMANN PRODUCTS		VUE/VIEW
		CH-1345 LE LIEU SWITZERLAND		EUROPE
TOLERANCE GENERALE / GENERAL TOLERANCE		ECHELLE / SCALE		N° MAG
TRAITEMENT / FINISH		4/10		EMIB07
MATIERE / MATERIAL		DESSEIN LE / DRAWN THE		20.02.2014
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		PAR / BY		
DESIGNATION		VERIFIE PAR / VERIFIED BY		M.B.
EPDU MI 0U (3Ø9 32A 3P)6XC13:12XC19		NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		X
COTES A CONTROLER / INSPECTION DIMENSIONS		DIMENSIONS AND TOLERANCES IN MILLIMETERS		
# XX.XX		NUMERO DU PLAN / PLAN NUMBER		03
COTES FONCTIONNELLES / FUNCTIONAL DIMENSIONS		NUMERO DU PLAN / PLAN NUMBER		03
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				